



EMC TEST REPORT

Applicant Bimirth(UK) Co., Ltd.
Rm101, Maple House, 118 High Street, Purley, London, England,
United Kingdom.

Manufacturer Roychin Innovation Co., Ltd.
No.3 of Shapu Road, Shapu, Jun'an Town, Shunde Area, Foshan
City, China.

Equipment under test (EUT)


Product Name Breast Pump


Model No. PM-012, PM-013, PM-022, PM-112, PM-116, PM-117, PM-118,
PM-119, PM-120, PM-121, PM-122, PM-123, PM-124, PM-125,
PM-126, PM-127, PM-128, PM-129, PM-130, S1012, S1013,
S1022, S1023, S1024, S1025, S1026, S1027, S1028, S1029,
S1030, S1031, S1032, S1033, S1034, S1035, S1112, S1113,
S1114, S1115, S1116, S1117, S1118, S1119, S1120, S1121,
S1122, S1123, S1124, S1125, S1126, S1127, S1128, S1129,
S1130(All models have similar mechanical construction, electrical
construction, and rated power, only difference with appearance,so
full tests were carried out on odel PM-118)

Standards EN 61000-3-2: 2014
EN 61000-3-3: 2013
EN 55014-1: 2006+A1: 2009+A2: 2011
EN 55014-2: 2015

Date of Test From 2017-03-14 to 2017-04-10

Date of issue 2017-04-10

Project Engineer Alan Ian 
Alan Ian

Reviewed by 
Peter cheng





Testing laboratory

Guangzhou Certitek Testing Services Co., Ltd

Testing location

Room703/7F, Development Building, Tian An Hi-Tech
Ecological Park, No.555 North Road Panyu Avenue, Panyu
District, Guangzhou, 511400, China



Test Result

PASS*

* The sample detailed above has been tested to the requirements of Council Directives 2014/30/EU. The test results have been reviewed against the Directives above and found to meet their essential requirements.



Contents

1	Test Summary	6
1.1	Disturbance Test Items	6
1.2	Immunity Test Items	6
1.3	Test Uncertainty	6
2	General Information	7
2.1	Client Information	7
2.2	Detail of EUT	7
2.3	Principle of Configuration Selection	7
2.4	Block Diagram of EUT Configuration during the Test	7
2.5	Test Instruction	7
2.6	Classification of EUT	7
3	Test Equipment	9
4	Conducted Disturbance Test	11
4.1	Test Standard	11
4.2	Diagram Test Setup	11
4.3	Test Equipment's Used	11
4.4	Test Description	11
4.4.1	Equipment Test Setup	11
4.4.2	EUT Operation	12
4.5	Test Procedure	12
4.6	Conducted Disturbance Limit	12
4.7	Test Result and Test Data	12
5	Disturbance Power Test	15
5.1	Test Standard	15
5.2	Diagram Test Setup	15
5.3	Test Equipment's Used	15
5.4	Test Description	15
5.4.1	Equipment Test Setup	15
5.4.2	EUT Operation	16
5.5	Test Procedure	16
5.6	Radiated Disturbance Limit	16
5.7	Test Result and Test Data	16
6	Harmonic Current Emissions on AC Mains	18
6.1	Test Standard	18
6.2	Diagram Test Setup	18
6.3	Test Equipment's Used	18
6.4	Test Description	18
6.5	Test Result and Test Data	18
7	Flicker and Voltage Fluctuations	25
7.1	Test Standard	25
7.2	Diagram Test Setup	25
7.3	Test Equipment's Used	25
7.4	Test Description	25

7.5	Test Result and Test Data	25
8	Electrostatic Discharges.....	27
8.1	Test Standards.....	27
8.2	Diagram of Test Setup	27
8.3	Test Equipment Used.....	27
8.4	Test Required and Performance Criterion	28
8.5	Test Description.....	28
8.5.1	EUT Operation.....	28
8.5.2	Test Procedure.....	28
8.6	Test Results.....	29
9	Electrical Fast Transients.....	30
9.1	Test Standards.....	30
9.2	Diagram of Test Setup	30
9.3	Test Equipment Used.....	30
9.4	Test Required and Performance Criterion	30
9.5	Test Description.....	31
9.5.1	EUT Operation.....	31
9.5.2	Test Procedure.....	31
9.6	Test Results.....	32
10	Surges	33
10.1	Test Standards.....	33
10.2	Diagram of Test Setup	33
10.3	Test Equipment Used.....	33
10.4	Test Required and Performance Criterion	33
10.5	Test Description.....	34
10.5.1	EUT Operation.....	34
10.5.2	Test Procedure.....	34
10.6	Test Results.....	35
11	Conducted Immunity	36
11.1	Test Standards.....	36
11.2	Diagram of Test Setup	36
11.3	Test Equipments Used	36
11.4	Test Required and Performance Criterion	36
11.5	Test Description.....	37
11.5.1	EUT Operation.....	37
11.5.2	Test Procedure.....	37
11.6	Test Results.....	38
12	Voltage Dips and Interruptions	39
12.1	Test Standards.....	39
12.2	Diagram of Test Setup	39
12.3	Test Equipment Used.....	39
12.4	Test Required and Performance Criterion	39
12.5	Test Description.....	40
12.5.1	EUT Operation.....	40
12.5.2	Test Procedure.....	40



12.6	Test Results.....	40
13	Photographs of EUT	41



1 Test Summary

1.1 Disturbance Test Items

Test Item	Test Required	Test Results
Conducted Disturbance	EN 55014-1:2006+A1:2009+A2:2011	PASS
Disturbance Power	EN 55014-1:2006+A1:2009+A2:2011	PASS
Harmonic Current Emissions	EN 61000-3-2:2014	PASS
Flicker and Voltage Fluctuations	EN 61000-3-3:2013	PASS

1.2 Immunity Test Items

Test Item	Test Required	Test Results
Electrostatic Discharges (ESD)	EN 55014-2:2015 EN 61000-4-2:2009	PASS
Radio-Frequency Electromagnetic Field(RS)	EN 55014-2:2015 EN 61000-4-3:2006/A1:2008/A2:2010	N/A
Electrical Fast Transients (EFT)	EN 55014-2:2015 EN 61000-4-4:2012	PASS
Surges	EN 55014-2:2015 EN 61000-4-5:2014	PASS
Conducted Immunity	EN 55014-2:2015 EN 61000-4-6:2014	PASS
Voltage Dips and Interruptions	EN 55014-2:2015 EN 61000-4-11:2004	PASS

Note:

☐PASS: Indicates that the test is applicable.

N/A: Indicates that the test is not applicable.

1.3 Test Uncertainty

Radiated Disturbance:±2.2dB

Conducted Disturbance:±1.8dB

2 General Information

2.1 Client Information

Applicant : Roychin Innovation Co., Ltd.

Address : No.3 of Shapu Road, Shapu, Jun'an Town, Shunde Area, Foshan City, China.

Manufacturer : Roychin Innovation Co., Ltd.

Address : No.3 of Shapu Road, Shapu, Jun'an Town, Shunde Area, Foshan City, China.

2.2 Detail of EUT

Product : Breast Pump

Model No. : PM-118


Technical : 5V $\square$ 6W (The adapter: Input:230V~,50Hz,0.15A;Output:5V $\square$,1A)

2.3 Principle of Configuration Selection

Emission Test: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

Immunity Test: The equipment under test (EUT) was configured to the representative operating mode and conditions.

2.4 Block Diagram of EUT Configuration during the Test



2.5 Test Instruction

All the tests were performed in the condition of 230V~, 50Hz input.

2.6 Classification of EUT

Category I : Apparatus containing no electronic control circuitry



- Category II** : Apparatus containing electronic control circuitry with no internal clock frequency or oscillator frequency higher than 15 MHz
- Category III** : Apparatus battery powered apparatus, which in normal use is not connected to the mains, containing an electronic control circuitry with no internal clock frequency or oscillator frequency higher than 15 MHz
- Category IV** : All other apparatus

Due to the oscillator frequency of EUT lower than 15MHz, According to EN 55014-2 EUT to belong to Category II device, so the Radio-Frequency Electromagnetic Field test not apply.

3 Test Equipment

Equipment Name	Manufacturer Model	Equipment No.	Internal No	Specification	Cal. Date	Due Date
EMC Analyzer	Agilent/ E7405A	MY451149 43	W2008001	9k-26.5GHz	2016-8-12	2017-8-11
Trilog Broadband Antenne 30-3000 MHz	SCHWARZBEC K MESS-ELEKTR OM/ VULB9163	336	W2008002	30-3000 MHz	2016-8-12	2017-8-11
Broadband Preamplifier 0.5-18 GHz	SCHWARZBEC K MESS-ELEKTR OM/ BBV 9718	9718-148	W2008004	0.5-18GHz	2016-8-12	2017-8-11
10m Coaxial Cable with N-male Connectors usable up to 18GHz,	SCHWARZBEC K MESS-ELEKTR OM/ AK 9515 H	--	--	--	2016-8-12	2017-8-11
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector	SCHWARZBEC K MESS-ELEKTR OM/ AK 9513	--	--	--	2016-8-12	2017-8-11
Positioning Controller	C&C LAB/ CC-C-IF	--	--	--	N/A	N/A
Color Monitor	SUNSP0/ SP-14C	--	--	--	N/A	N/A
Test Receiver	ROHDE&SCHW ARZ/ ESPI 3	101155	W2005001	9k-3GHz	2016-8-12	2017-8-11
EMI Receiver	Beijingkehuan	KH3931	--	9k-1GHz	2016-8-12	2017-8-11
Two-Line V-Network	ROHDE&SCHW ARZ/ ENV216	100115	W2005002	50Ω/50μH	2016-8-12	2017-8-11
V—LISN	SCHWARZBEC K MESS— ELEKTRONIK	NSLK8128	8128-259	9k-30MHz	2016-8-12	2017-8-11
Absorbing Clamp	ROHDE&SCHW ARZ/ MDS-21	100205	W2005003	impedance 50Ω loss : 17 dB	2016-8-12	2017-8-11
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connectors	SCHWARZBEC K MESS-ELEKTR OM/ AK 9514	--	--	--	2016-8-12	2017-8-11
Digital Power Analyzer	Em Test AG/Switzerland/ DPA 500	V07451 03095	W2008012	Power: 2000VA Vol-range:	2016-8-12	2017-8-11




Equipment Name	Manufacturer Model	Equipment No.	Internal No	Specification	Cal. Date	Due Date
				0-300V Freq_range : 10-80Hz		
Power Source	Em Test AG/Switzerland/ ACS 500	V07451 03096	W2008013	Vol-range: 0-300V Power_freq : 10-80Hz	2016-8-12	2017-8-11
Electrostatic Discharge Simulator	Em Test AG/Switzerland/ DITO	V07451 03094	W2008005	Contact discharge: 500V-10KV Air diacharge: 500V-16.5K V	2016-8-12	2017-8-11
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Fraq-range : 9K-1GHz RF voltage: -60 dBm-+10dB m	2016-8-12	2017-8-11
CDN M-Type	TESEQ GmbH/ CDN M016	25112	W2008009	Voltage correct factor 9.5 dB	2016-8-12	2017-8-11
EM-Clamp	TESEQ GmbH/ KEMZ 801	25453	W2008010	Freq_range : 0.15-1000 MHz	2016-8-12	2017-8-11
Attenuator 6dB	TESEQ GmbH/ ATN6050	25365			2016-8-12	2017-8-11
All Modules Generator	SCHAFFNER/61 50	34579	W2008006	voltage:200V -4.4KV Pulse current: 100A-2.2KA	2016-8-12	2017-8-11
Capacitive Coupling Clamp	SCHAFFNER/ CDN 8014	25311	--	--	2016-8-12	2017-8-11
Signal and Data Line Coupling Network	SCHAFFNER/ CDN 117	25627	W2008011	1.2/50μS	2016-8-12	2017-8-11
AC Power Supply	TONGYUN/ DTDGC-4	--	--	--	2016-8-12	2017-8-11

4 Conducted Disturbance Test

4.1 Test Standard

EN 55014-1:2006+A1:2009+A2:2011

4.2 Diagram Test Setup

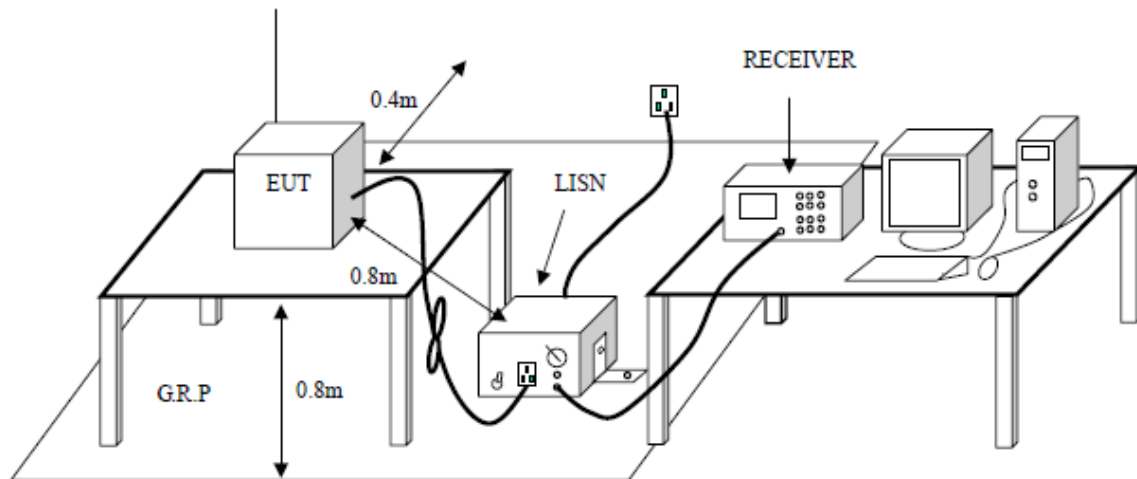

4.3 Test Equipment's Used

Refer to see section 3.

4.4 Test Description

4.4.1 Equipment Test Setup

EMI Test Receiver Setting:

Detector: Quasi-Peak and Average

Band Width: 9 KHz

Frequency Range: 150 KHz to 30MHz

4.4.2 EUT Operation

Turn on the EUT.

Let the EUT work in normal operation mode.

4.5 Test Procedure

During the test the EUT was placed on a non-conductive table which is 0.8 meter above the grounded reference plane. Connected the power line of the LISN and connected the receiver to LISN by coaxial line. Detected the disturbance signals of the live line and neutral line.

4.6 Conducted Disturbance Limit


Frequency Range MHz	Limits(dBuV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56	59 to 46
0.5 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

4.7 Test Result and Test Data


Test Result: PASS

Test Data:

Test data refer to see following pages.

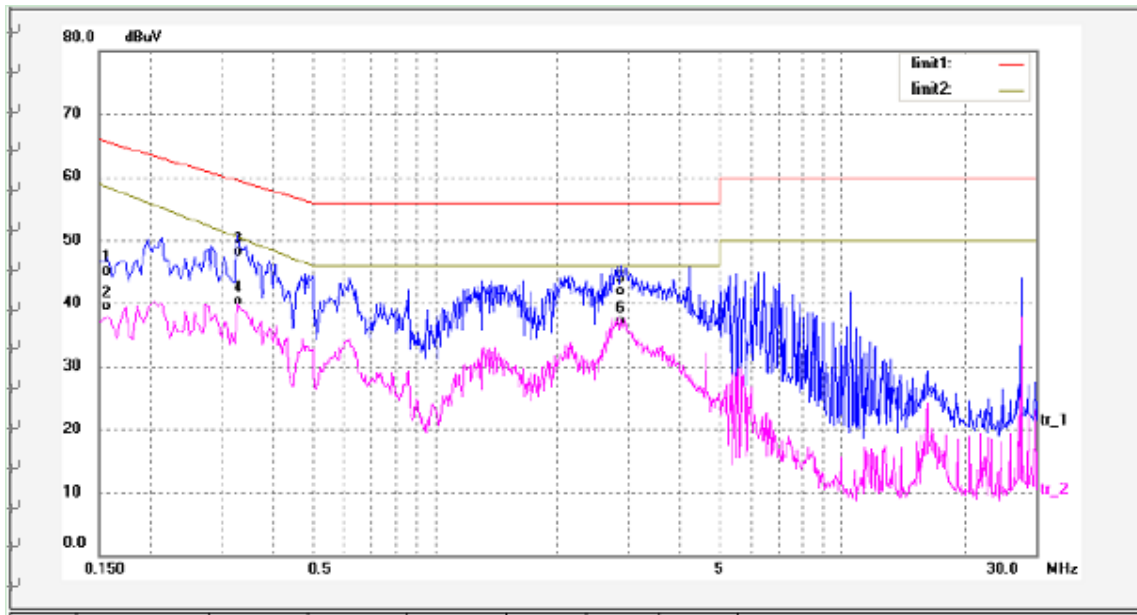Live Line:

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1582	34.14	10.35	44.49	65.53	-21.04	QP	Pass
2	0.1582	28.42	10.35	38.77	58.43	-19.66	AVG	Pass
3	0.3308	36.93	10.35	47.28	59.44	-12.16	QP	Pass
4	0.3308	29.22	10.35	39.57	50.48	-10.91	AVG	Pass
5	2.8620	30.38	10.38	40.76	56.02	-15.26	QP	Pass
6	2.8620	26.11	10.38	36.49	46.09	-9.60	AVG	Pass

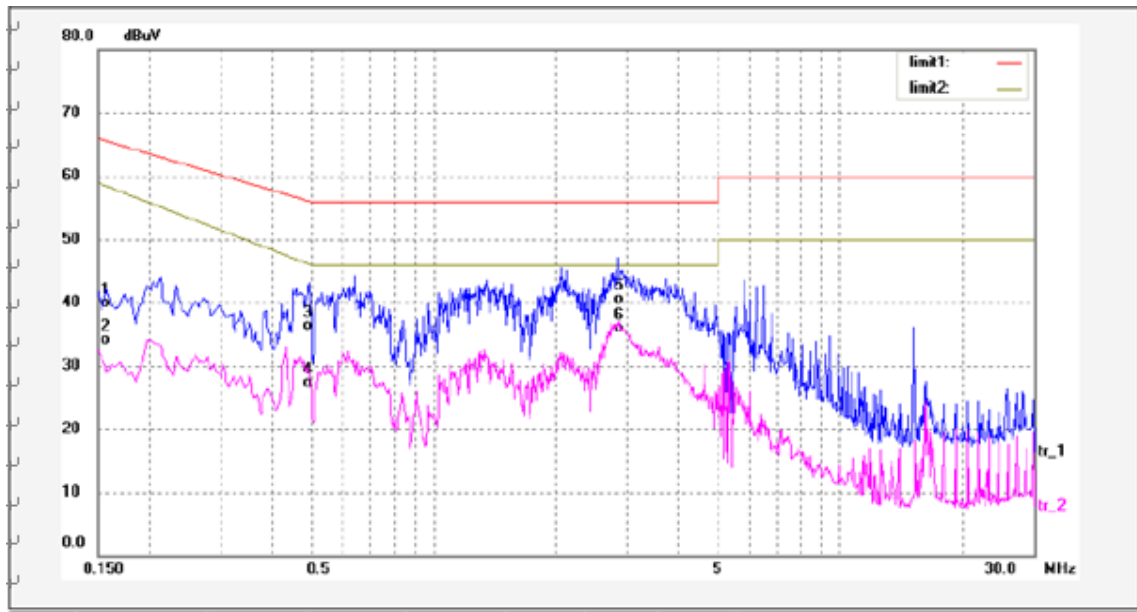Neutral Line:


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1582	28.94	10.35	39.29	65.53	-26.24	QP	Pass
2	0.1582	22.92	10.35	33.27	58.43	-25.16	AVG	Pass
3	0.4980	25.17	10.35	35.52	56.04	-20.52	QP	Pass
4	0.4980	16.11	10.35	26.46	54.18	-27.72	AVG	Pass
5	2.8520	29.46	10.38	39.84	56.02	-16.18	QP	Pass
6	2.8520	24.81	10.38	35.19	46.09	-10.90	AVG	Pass

5 Disturbance Power Test

5.1 Test Standard

EN 55014-1:2006+A1:2009+A2:2011

5.2 Diagram Test Setup

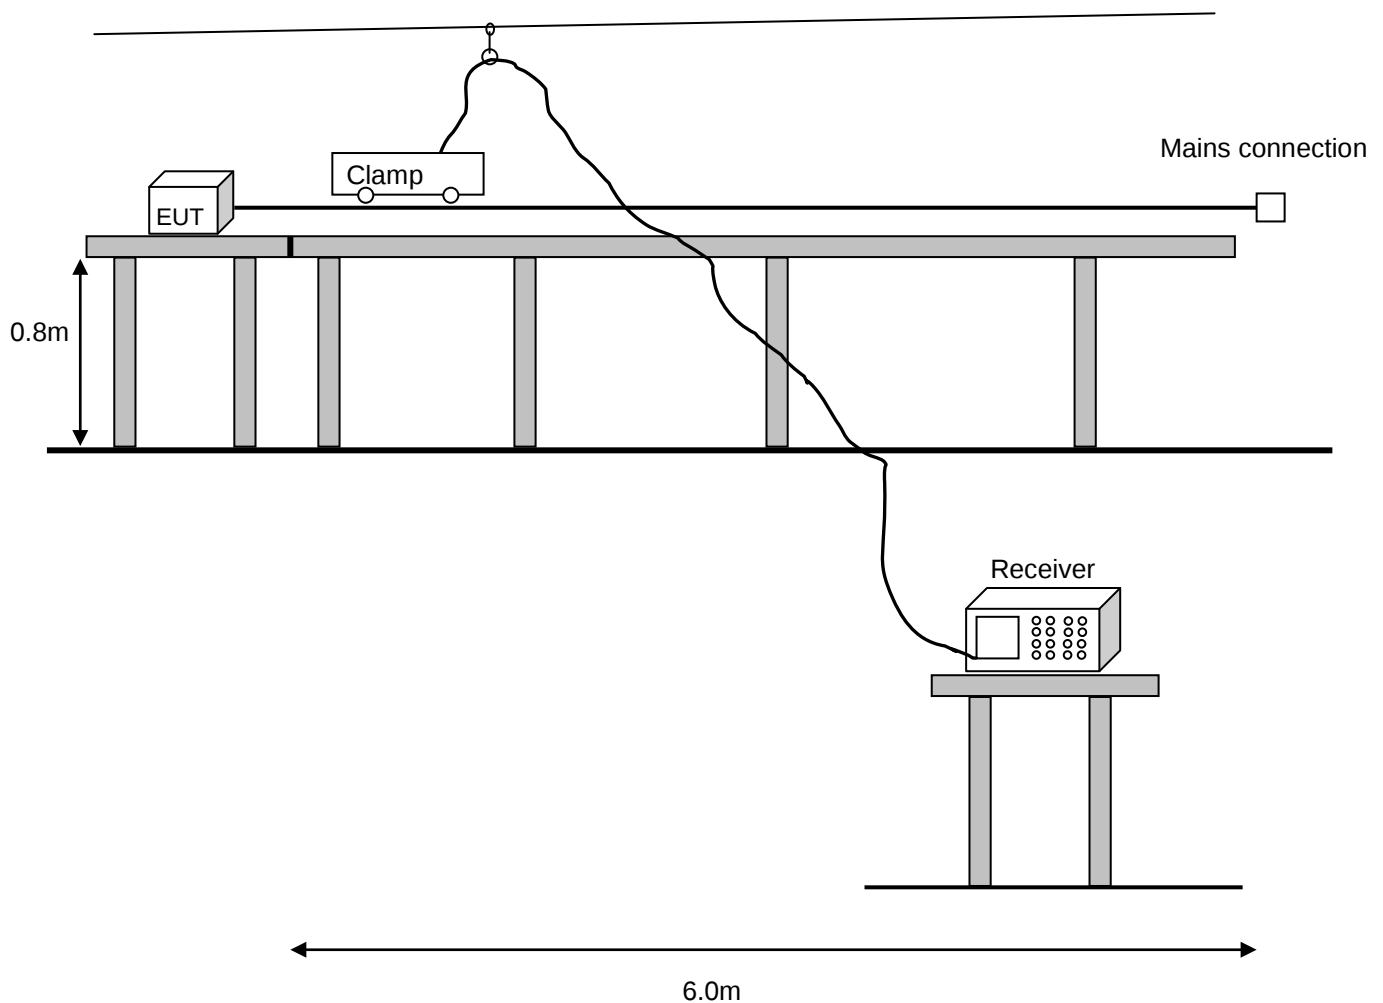

5.3 Test Equipment's Used

Refer to see section 3.

5.4 Test Description

5.4.1 Equipment Test Setup

Detector: Quasi-Peak and Average



Band Width: 120 KHz

Frequency Range: 30MHz to 300MHz

Clamp slide: 0 to 6 m

5.4.2 EUT Operation

The operation mode of EUT is same as Section 3.4.2.

5.5 Test Procedure

The EUT is placed on the table which is high 0.8m by insulating support and away from other metallic surface at least 0.8m. It is connected to the power mains through an extension cord of 6m minimums. The absorber clamp was clamps the cord and moves from the far end to EUT to measure the disturbing energy emitted from the cord.

5.6 Radiated Disturbance Limit


Frequency Range MHz	Limits(dBpW)	
	Quasi-Peak	Average
30 to 300	45 to 55	35 to 45
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 30 MHz to 300 MHz		

5.7 Test Result and Test Data

Test Result: PASS

Test Data:

Test data refer to see following pages.

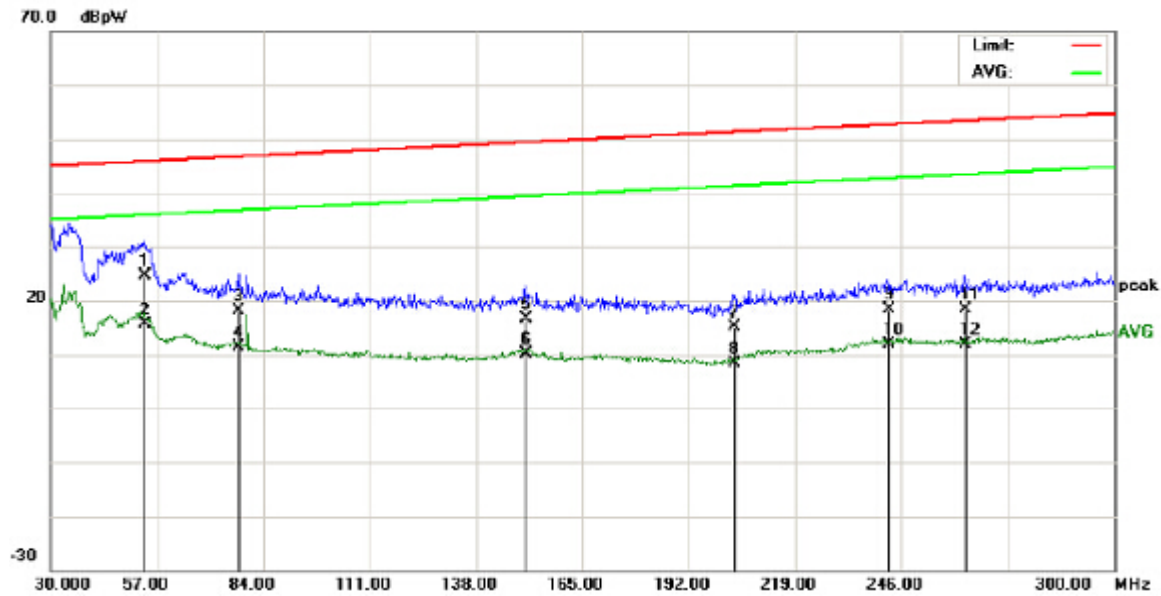


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuW)	Limit (dBuW)	Margin (dB)	Detector	Remark
1	53.5200	1.45	23.31	24.76	45.87	-21.11	QP	Pass
2	53.5200	-7.55	23.31	15.76	35.87	-20.11	AVG	Pass
3	77.5199	-2.72	20.93	18.21	46.76	-28.55	QP	Pass
4	77.5199	-9.48	20.93	11.45	36.76	-25.31	AVG	Pass
5	150.5600	-3.54	20.23	16.69	49.47	-32.78	QP	Pass
6	150.5600	-10.13	20.23	10.10	39.47	-29.37	QP	Pass
7	203.5200	-4.26	19.31	15.05	51.43	-36.38	QP	Pass
8	203.5200	-10.91	19.31	8.40	41.43	-33.03	AVG	Pass
9	242.6000	-4.25	22.66	18.41	52.87	-34.46	QP	Pass
10	242.6000	-10.92	22.66	11.74	42.87	-31.13	AVG	Pass
11	261.9600	-4.19	22.67	18.48	53.59	-35.11	QP	Pass
12	261.9600	-10.89	22.67	11.78	43.59	-31.81	AVG	Pass

6 Harmonic Current Emissions on AC Mains

6.1 Test Standard

EN 61000-3-2:2014

6.2 Diagram Test Setup

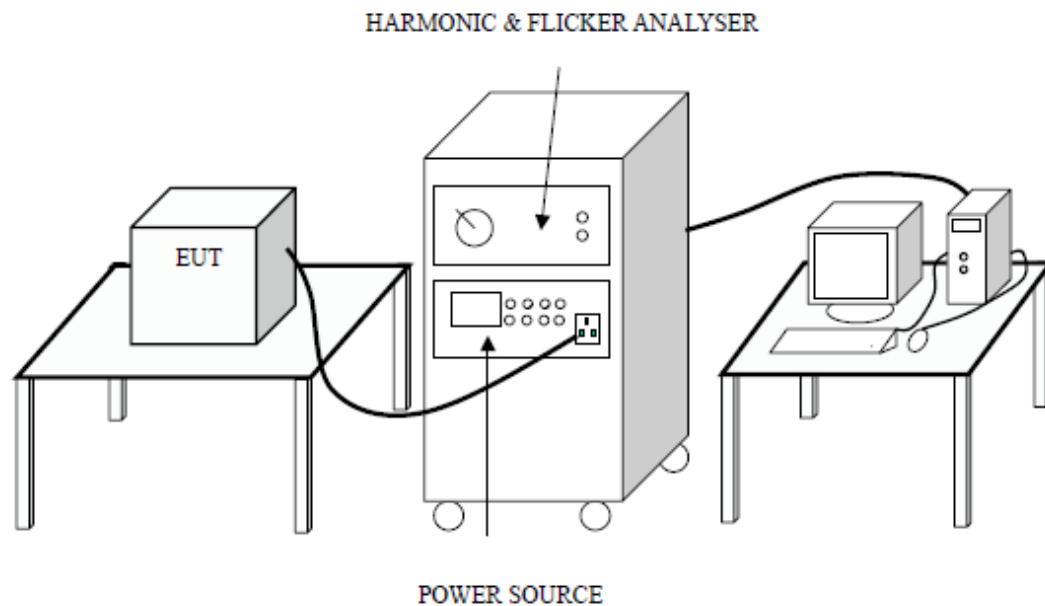

6.3 Test Equipment's Used

Refer to see section 3.

6.4 Test Description

Test Procedure see clause 6 of standard EN61000-3-2.

6.5 Test Result and Test Data

Test Result: PASS



E. U. T. Result

Check harmonics 2..40 [exception odd 21..39]:

Harmonic(s) > 150%:		
Order (n):		None
Harmonic(s) with average > 100%:		
Order (n):		None

Check odd harmonics 21..39:

All Partial Odd Harmonics below partial limits.		
Harmonic(s) > 150%:		
Order (n):		None
Harmonic(s) with average > 150%:		
Order (n):		None

Power Source Result

First dataset out of limit:		
DS (time):		None
Harmonic(s) out of limit:		
Order (n):		None

Average harmonic current results

Hn	I _{eff} [A]	I _{eff} [%]	Limit [A]	Result
1	3.280	100.000		
2	320.302E-3	9.762	1.05	PASS
3	90.013E-3	2.742	2.35	PASS
4	60.368E-3	1.839	430.00E-3	PASS
5	41.872E-3	1.274	1.14	PASS
6	28.304E-3	0.854	300.00E-3	PASS
7	38.027E-3	1.159	770.00E-3	PASS
8	19.865E-3	0.600	230.00E-3	PASS
9	28.147E-3	0.856	400.00E-3	PASS
10	14.496E-3	0.440	184.00E-3	PASS
11	26.634E-3	0.811	330.00E-3	PASS
12	11.982E-3	0.364	153.33E-3	PASS
13	22.002E-3	0.671	210.00E-3	PASS
14	9.834E-3	0.299	131.43E-3	PASS
15	18.705E-3	0.569	150.00E-3	PASS
16	8.312E-3	0.252	115.00E-3	PASS
17	15.998E-3	0.487	132.34E-3	PASS
18	7.512E-3	0.228	102.22E-3	PASS
19	13.754E-3	0.421	118.42E-3	PASS
20	6.823E-3	0.209	92.00E-3	PASS
21	13.585E-3	0.415	160.71E-3	PASS
22	6.542E-3	0.198	83.64E-3	PASS
23	11.051E-3	0.337	146.74E-3	PASS
24	5.498E-3	0.167	76.66E-3	PASS
25	10.524E-3	0.320	135.00E-3	PASS
26	5.602E-3	0.170	70.77E-3	PASS
27	8.334E-3	0.253	124.99E-3	PASS
28	5.086E-3	0.156	65.71E-3	PASS
29	8.697E-3	0.265	116.39E-3	PASS
30	4.982E-3	0.152	61.33E-3	PASS
31	6.901E-3	0.210	108.87E-3	PASS
32	4.356E-3	0.134	57.50E-3	PASS
33	6.752E-3	0.206	102.27E-3	PASS
34	4.493E-3	0.137	54.12E-3	PASS
35	5.721E-3	0.174	96.44E-3	PASS
36	4.307E-3	0.130	51.11E-3	PASS
37	5.882E-3	0.181	91.21E-3	PASS
38	3.973E-3	0.120	48.42E-3	PASS
39	5.431E-3	0.165	86.53E-3	PASS
40	3.820E-3	0.116	46.00E-3	PASS

Maximum harmonic current results



Hn	I _{eff} [A]	I _{eff} [%]	Limit [A]	Result
1	6.230	100.000		
2	1.134	18.201	1.64	PASS
3	274.603E-3	4.440	3.45	PASS
4	235.511E-3	3.779	645.00E-3	PASS
5	85.682E-3	1.376	1.71	PASS
6	112.251E-3	1.802	450.00E-3	PASS
7	87.443E-3	1.401	1.15	PASS
8	78.234E-3	1.257	345.00E-3	PASS
9	52.995E-3	0.851	600.00E-3	PASS
10	57.231E-3	0.918	276.00E-3	PASS
11	53.452E-3	0.859	495.00E-3	PASS
12	46.232E-3	0.741	229.99E-3	PASS
13	39.965E-3	0.642	315.00E-3	PASS
14	40.013E-3	0.642	197.15E-3	PASS
15	39.421E-3	0.631	225.00E-3	PASS
16	33.356E-3	0.537	172.50E-3	PASS
17	31.285E-3	0.501	198.52E-3	PASS
18	30.472E-3	0.489	153.33E-3	PASS
19	30.863E-3	0.494	177.63E-3	PASS
20	27.012E-3	0.433	138.00E-3	PASS
21	26.215E-3	0.421	160.71E-3	PASS
22	25.003E-3	0.401	125.46E-3	PASS
23	25.515E-3	0.409	146.74E-3	PASS
24	22.665E-3	0.364	114.99E-3	PASS
25	21.996E-3	0.353	135.00E-3	PASS
26	21.436E-3	0.342	106.16E-3	PASS
27	21.524E-3	0.344	124.99E-3	PASS
28	19.857E-3	0.318	98.57E-3	PASS
29	19.848E-3	0.317	116.39E-3	PASS
30	18.752E-3	0.301	92.00E-3	PASS
31	18.864E-3	0.302	108.87E-3	PASS
32	17.803E-3	0.284	86.25E-3	PASS
33	17.374E-3	0.279	102.27E-3	PASS
34	16.641E-3	0.267	81.18E-3	PASS
35	16.652E-3	0.267	96.44E-3	PASS
36	15.998E-3	0.257	76.66E-3	PASS
37	15.645E-3	0.253	91.21E-3	PASS
38	15.359E-3	0.247	72.63E-3	PASS
39	15.352E-3	0.246	86.53E-3	PASS
40	14.824E-3	0.237	69.00E-3	PASS


Maximum harmonic voltage results

Hn	Ueff [V]	Ueff [%]	Limit [%]	Result
1	230.37	100.165		
2	79.69E-3	0.034	0.2	PASS
3	113.01E-3	0.049	0.9	PASS
4	13.58E-3	0.006	0.2	PASS
5	53.99E-3	0.023	0.4	PASS
6	11.85E-3	0.005	0.2	PASS
7	76.21E-3	0.033	0.3	PASS
8	21.89E-3	0.010	0.2	PASS
9	65.29E-3	0.028	0.2	PASS
10	15.34E-3	0.006	0.2	PASS
11	67.82E-3	0.029	0.1	PASS
12	32.14E-3	0.014	0.1	PASS
13	85.14E-3	0.037	0.1	PASS
14	40.57E-3	0.017	0.1	PASS
15	94.47E-3	0.041	0.1	PASS
16	35.70E-3	0.015	0.1	PASS
17	76.98E-3	0.033	0.1	PASS
18	20.99E-3	0.009	0.1	PASS
19	69.76E-3	0.030	0.1	PASS
20	42.75E-3	0.018	0.1	PASS
21	91.76E-3	0.040	0.1	PASS
22	52.98E-3	0.023	0.1	PASS
23	64.99E-3	0.028	0.1	PASS
24	32.48E-3	0.014	0.1	PASS
25	50.13E-3	0.021	0.1	PASS
26	32.22E-3	0.014	0.1	PASS
27	82.83E-3	0.036	0.1	PASS
28	58.51E-3	0.025	0.1	PASS
29	69.14E-3	0.030	0.1	PASS
30	52.95E-3	0.023	0.1	PASS
31	52.93E-3	0.023	0.1	PASS
32	16.44E-3	0.007	0.1	PASS
33	52.50E-3	0.022	0.1	PASS
34	47.86E-3	0.020	0.1	PASS
35	75.22E-3	0.032	0.1	PASS
36	58.40E-3	0.025	0.1	PASS
37	42.33E-3	0.018	0.1	PASS
38	34.98E-3	0.015	0.1	PASS
39	37.12E-3	0.016	0.1	PASS
40	28.72E-3	0.012	0.1	PASS



No partial calculation (average odd harmonics [21..39] < 100%)

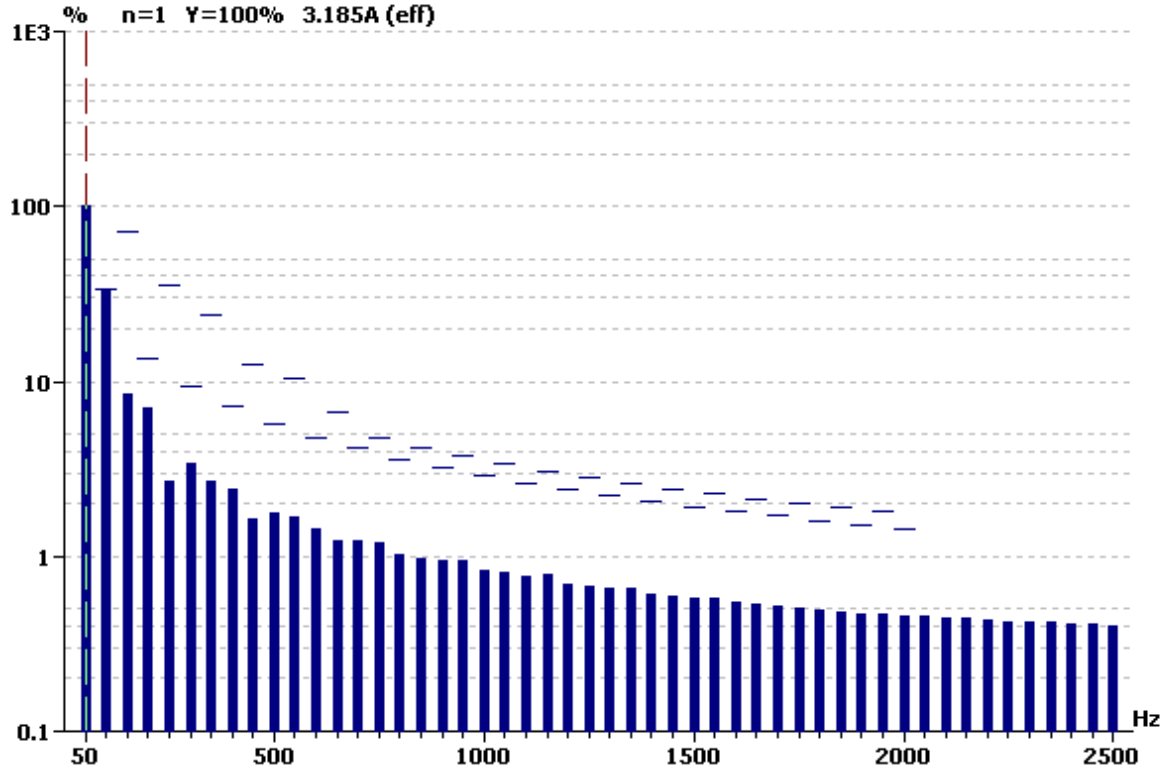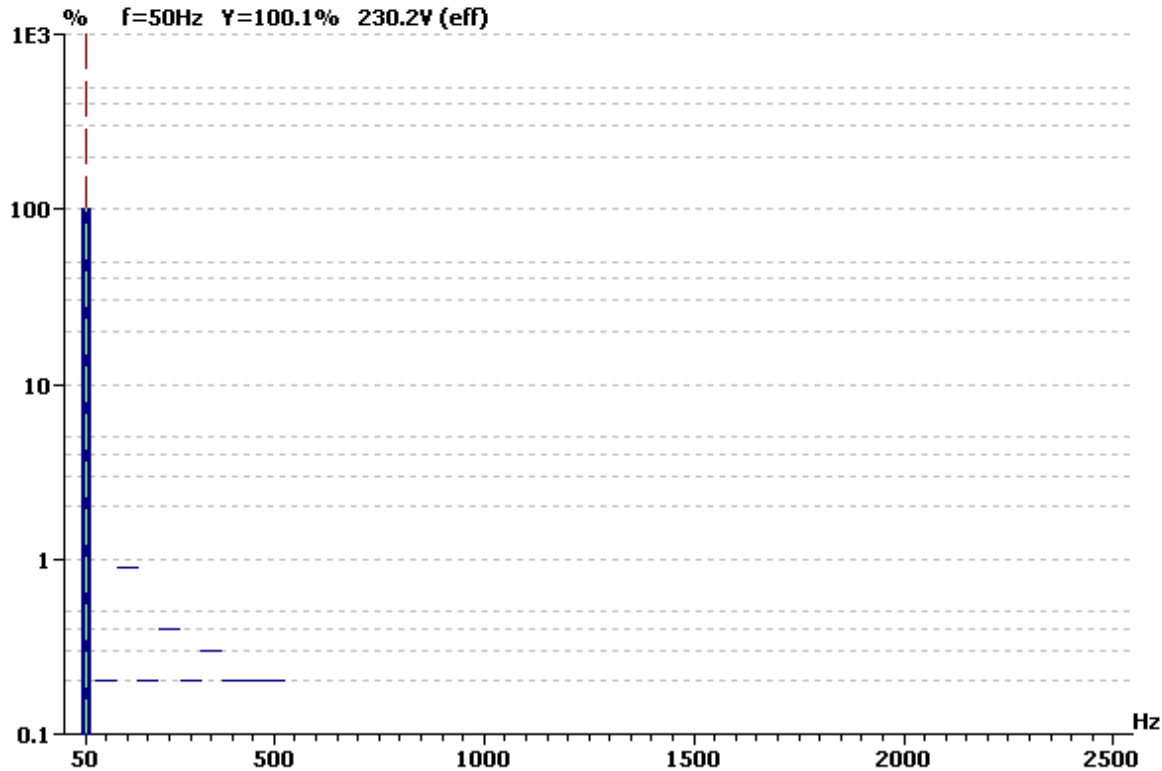

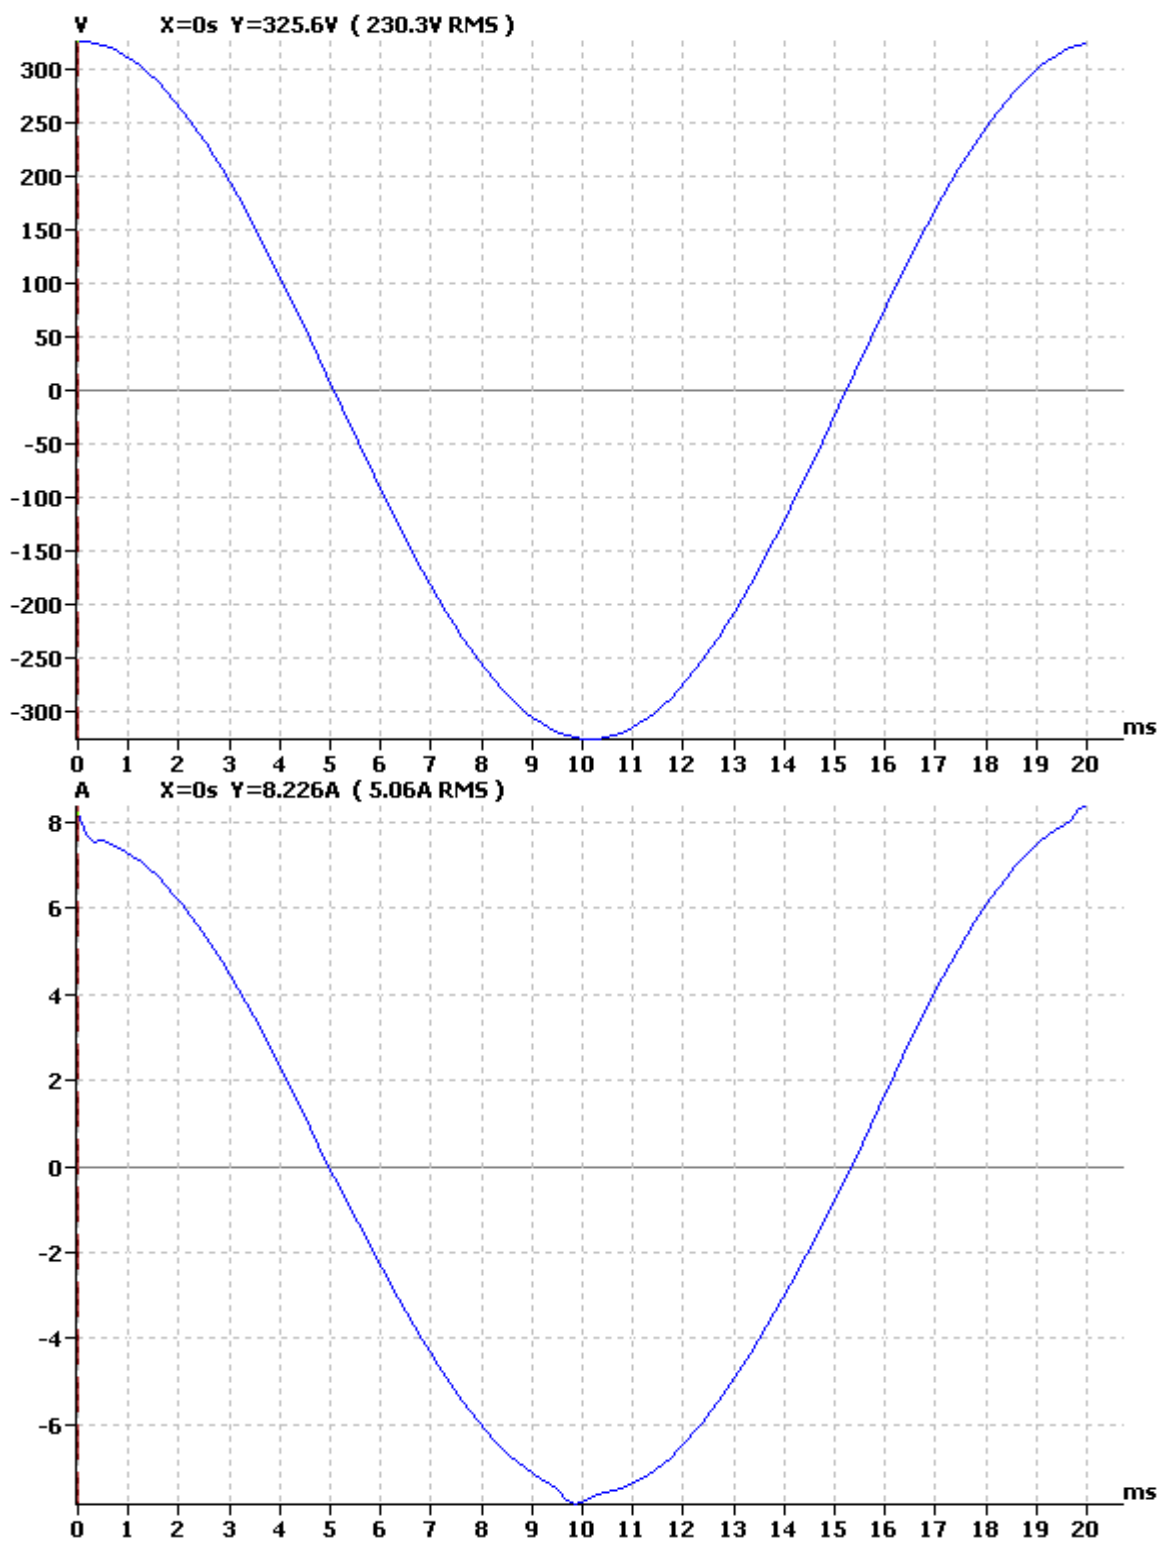


7 Flicker and Voltage Fluctuations

7.1 Test Standard

EN 61000-3-3:2013

7.2 Diagram Test Setup

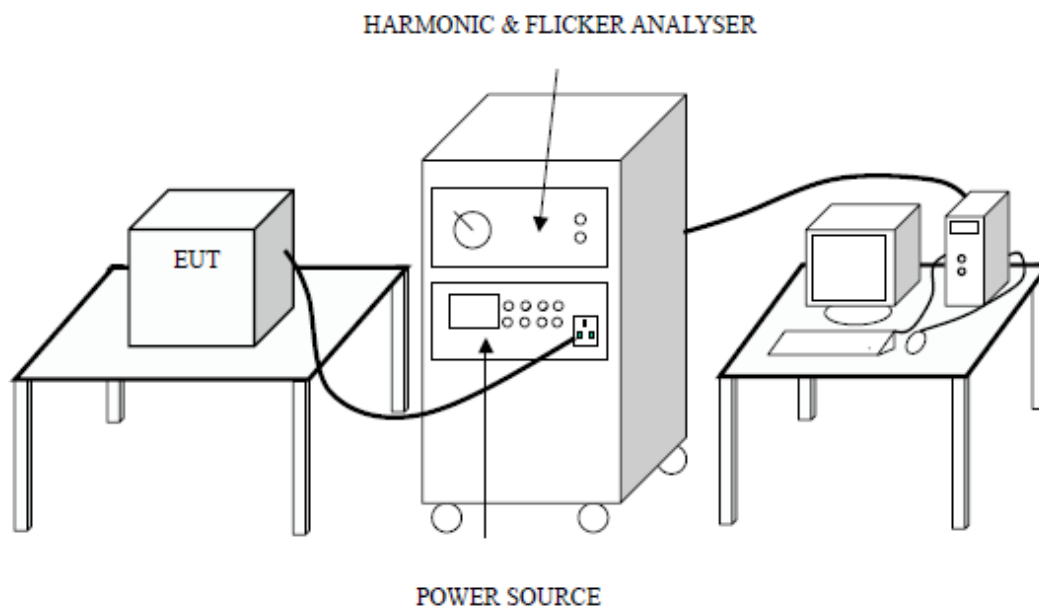

7.3 Test Equipment's Used

Refer to see section 3.

7.4 Test Description

Test Procedure see clause 6 of standard EN61000-3-3.

7.5 Test Result and Test Data

Test Result: PASS

Maximum Flicker results

	EUT values	Limit	Result
Pst	0.023	1.00	PASS
Plt	0.035	0.65	PASS
dc [%]	0.016	3.30	PASS
dmax [%]	0.450	4.00	PASS
dt [s]	0.004	0.50	PASS


8 Electrostatic Discharges

8.1 Test Standards

EN 55014-2:2015

EN 61000-4-2:2009

8.2 Diagram of Test Setup

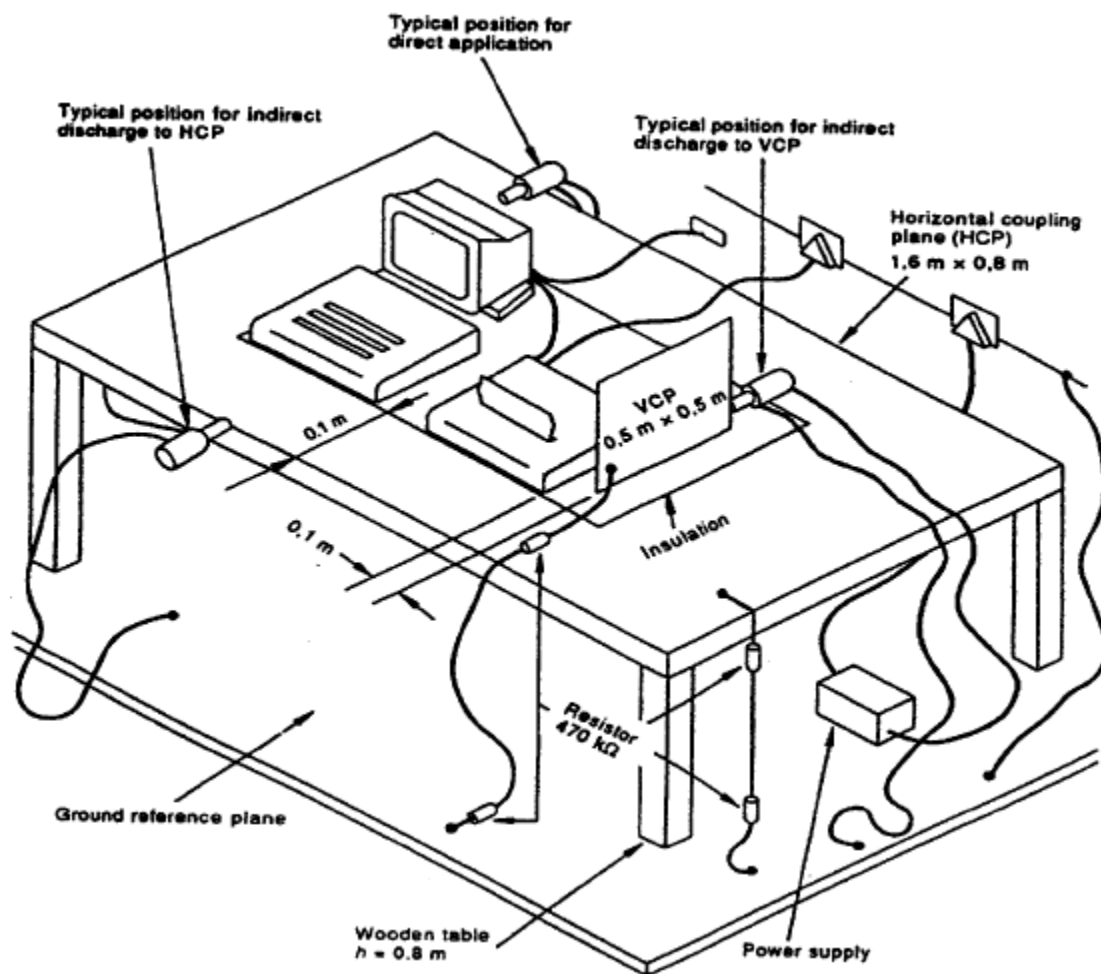

8.3 Test Equipment Used

Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
ESD tester	SCHNAFFNER	NSG435	8. 12, 2016	1 Year

8.4 Test Required and Performance Criterion

Test method	Test Level	Performance Criterion
Air Discharges	±8KV	B
Contact Discharges or Coupling	±4KV	B

8.5 Test Description

8.5.1 EUT Operation

The operation mode of EUT is same as Section 3.4.2.

8.5.2 Test Procedure

Air Discharge:

— This test is done on non-conductive surfaces. The round discharge tip of the Electrostatic Discharge simulator shall be approached as fast as possible then to touch the EUT. After each discharge, the simulator shall be removed from the EUT. The simulator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Contact Discharge:

— All the procedure shall be same as air discharge, except using the acute discharge tip. The top end of the Electrostatic Discharge simulator is touch the EUT all the time when the simulator is re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.

Indirect Discharge:

— The vertical coupling plane (VCP) is placed 0.1m away from EUT. The top end of Electrostatic Discharge simulator should aim at the center of one border of the VCP for at least 10 times discharge.

— The top end of Electrostatic Discharge simulator should place at the point 0.1m away from EUT on the horizontal coupling plane (HCP). At least 10 times discharge should be done for every pre-selected point around EUT.

Recording any performance degradation of the EUT during the test and judge the test result according to performance criterion.

8.6 Test Results

Immunity	ESD Electrostatic Discharge			☒ EN61000-4-2
Criterion:	B			Total: PASS
EUT	Breast Pump			
Ambient:	22.4°C	53% RH	1015mbar	
Test Site:				
Air Discharge:	±8kV	10 Discharges per test		
Contact/Indirect	±4kV	10 Discharges per test		
Operation Mode:	Working.			
Location		Kind	Result	
		Air Cont.		
All Exposed Surface & Seams		Air	PASS	
All metallic part		Cont.	PASS	
HCP		Cont.	PASS	
VCP		Cont.	PASS	
Note: Minimum 10 times at each test point				


9 Electrical Fast Transients

9.1 Test Standards

EN 55014-2:1997/A1:2001/A2:2008

EN 61000-4-4:2012

9.2 Diagram of Test Setup

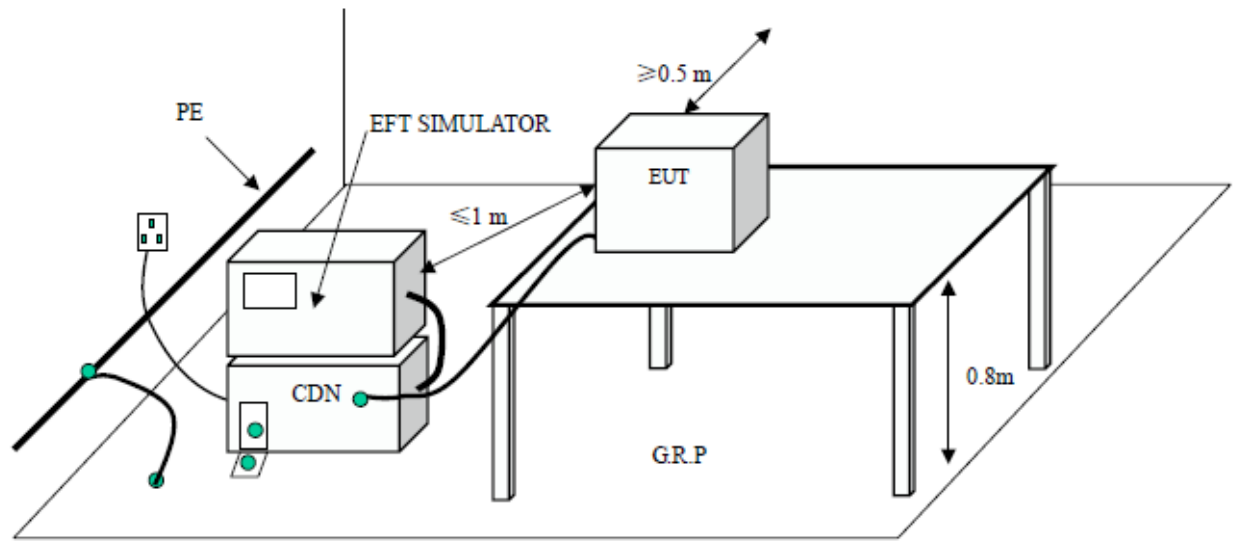

9.3 Test Equipment Used

Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
Simulator	EMTEST	UCS500M4	Aug. 12, 2016	1 Year

9.4 Test Required and Performance Criterion

Open Circuit Output Test Voltage And Repetition Rate Of The Impulses					Performance criterion
Level	On Power Supply Port and PE		On I/O (input/output) signal, data and control ports		
	Voltage Peak (kV)	Repetition Rate kHz	Voltage Peak (kV)	Repetition Rate kHz	
1	0.5kV	50 or 100	0.25	50 or 100	B
2	1	50 or 100	0.5	50 or 100	B
3	2	50 or 100	1	50 or 100	B
4	4	50 or 100	2	50 or 100	B
X	Special	Special	Special	Special	B



9.5 Test Description

9.5.1 EUT Operation

The operation mode of EUT is same as Section 3.4.2.

9.5.2 Test Procedure

For AC power input ports:

EUT is connected to coupling/decoupling network which couples the EFT signal to power input lines. During the test, both polarities of the test voltage should be applied and the duration of the test can't be less than 1mins.

For signal / control lines and DC power lines:

The cables of EUT no longer than 3 m, shall not be tested.

EUT and its simulators shall be placed 0.8m high above the ground reference plane which is a minimum 1m*1m with minimum 0.65mm thickness. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

Recording any performance degradation of the EUT during the test and judge the test result according to performance criterion.

9.6 Test Results

Immunity	EFT(Fast Transient / Burst)			☒ EN 61000-4-4		
Criterion:	B			Total: PASS		
EUT:	Breast Pump					
Ambient:	22.7°C	53% RH	1015mbar			
Operation Mode:	Working.					
Line: ☒ AC Mains ☐ DC Supply ☐ Signal: Coupling: ☒ Direct ☐ Capacitive Clamp						
Conductor	Voltage	+	-	Voltage	+	-
L1	1kV	PASS	PASS			
N	1kV	PASS	PASS			
PE	1kV	PASS	PASS			
L,PE	1kV	PASS	PASS			
N,PE	1kV	PASS	PASS			
L,N,PE	1kV	PASS	PASS			


10 Surges

10.1 Test Standards

EN 55014-2:2015

EN 61000-4-5:2014

10.2 Diagram of Test Setup

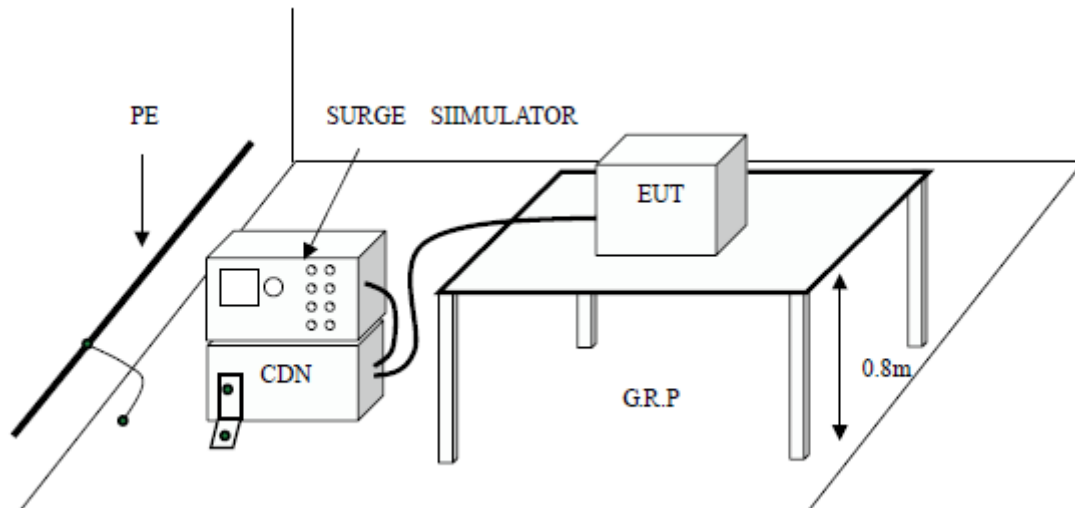

10.3 Test Equipment Used

Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
Simulator	EMTEST	UCS500M4	Aug.12, 2016	1 Year

10.4 Test Required and Performance Criterion

Level	Test Voltage kV
1	0.5
2	1.0
3	2.0
4	4.0
X	Special

Performance Criterion: B



Note:

1. At signal ports and telecommunication ports, Applicable only to ports which according to the manufacturer's specification may connect directly to outdoor cables. And where normal functioning cannot be achieved because of the impact of the CDN on the EUT, no test shall be required.
2. At input d.c. power ports, Applicable only to ports which according to the manufacturer's specification may connect directly to outdoor cables. And excluding equipment marketed with an a.c/d.c, power converter

10.5 Test Description

10.5.1 EUT Operation

The operation mode of EUT is same as Section 3.4.2.

10.5.2 Test Procedure

In this test, the 1.2/50us& 8/20us surge generator must be used for AC power ports. The voltage for line to earth coupling mode is twice of that for line to line. At least 5 positive and 5 negative (polarity) surge signal with a maximum 1/min repetition rate are injected to AC power lines from 4 different phase angle(0°,90°,180°,270) during the test.

Recording any performance degradation of the EUT during the test and judge the test result according to performance criterion.

10.6 Test Results

Immunity	Surge				☒ EN 61000-4-5						
Criterion:	B				Total: PASS						
EUT:	Breast Pump										
Repetition:	5 times per test		Interval:		60 sec.						
Ambient:	22.5°C		53% RH		1015mbar						
Operation Mode:	Working.										
Line:	☒ AC Mains ☐ DC Supply ☐ Signal:										
Conductor	Volt:	500V		1kV		2kV		3kV		4kV	
	Phase	+	-	+	-	+	-	+	-	+	-
L – PE	0°	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	90°	☐	☐	☐	☐	☒	☐	☐	☐	☐	☐
	180°	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	270°	☐	☐	☐	☐	☐	☒	☐	☐	☐	☐
N – PE	0°	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	90°	☐	☐	☐	☐	☒	☐	☐	☐	☐	☐
	180°	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	270°	☐	☐	☐	☐	☐	☒	☐	☐	☐	☐
L – N	0°	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	90°	☐	☐	☒	☐	☐	☐	☐	☐	☐	☐
	180°	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
	270°	☐	☐	☐	☒	☐	☐	☐	☐	☐	☐


11 Conducted Immunity

11.1 Test Standards

EN 55014-2:2015

EN 61000-4-6:2014

11.2 Diagram of Test Setup

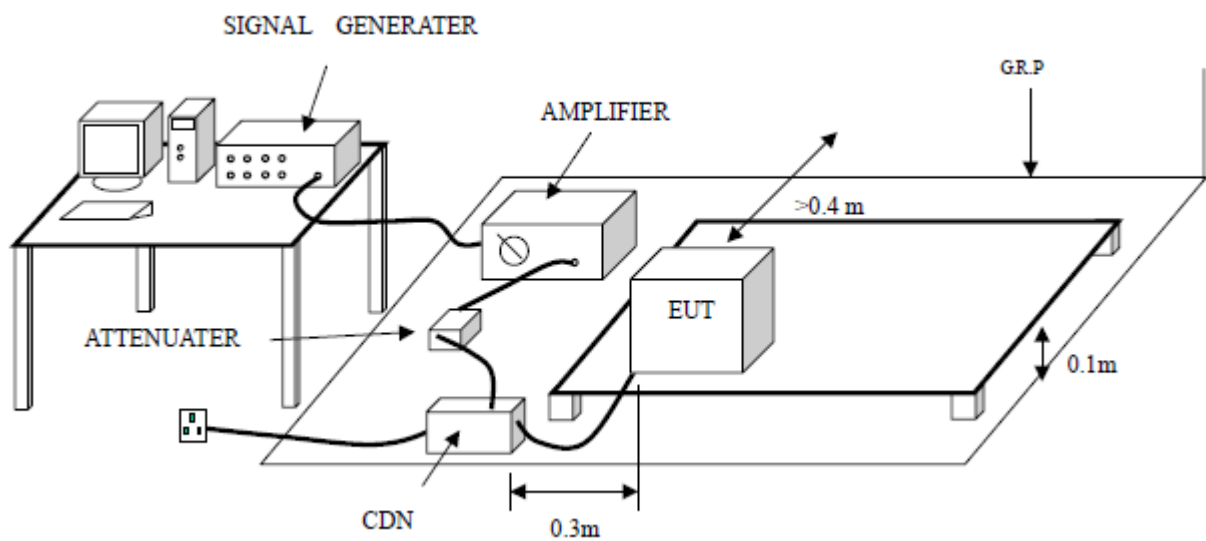

11.3 Test Equipments Used

Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
CW sine Generator	EMTEST	CWS500	Aug. 12, 2016	1 Year
CDN	EMTEST	CDN-M2	Aug. 12, 2016	1 Year

11.4 Test Required and Performance Criterion

Level	Voltage Level
1	0.4
2	1.0
3	2.01
4	4.5
X	Special

Performance Criterion: B



11.5 Test Description

11.5.1 EUT Operation

The operation mode of EUT is same as Section 3.4.2.

11.5.2 Test Procedure

Scanning Frequency: 150 KHz -- 80 MHz

Radiated Signal: 80% amplitude modulated with a 1 KHz sine wave.

Step Size: 1% of the start and thereafter 1% of the preceding frequency value.

Test specifications: 150 Ω source impedance.

EUT is placed on an insulating support of 0.1m high above a ground reference plane. It must be 0.3m away the CDN (coupling and decoupling network) of which the bottom is made of metallic material and placed directly on the ground plane. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible). The disturbance signal amplified by amplifier is injected to EUT through CDN.

Recording any performance degradation of the EUT during the test and judge the test result according to performance criterion.

11.6 Test Results

Immunity	Conducted Immunity			☒ EN 61000-4-6
Voltage level	3 V	Criterion:	A	Total: PASS
EUT:	Breast Pump			
Frequency Range:	150kHz to 80 MHz			
Modulation:	☐ none	☒ AM	☐ Pulse	1 kHz, 80%
Ambient:	22.4°C,	53% RH,	1015mbar	
Operation Mode:	Working.			
Line:	☒ AC Mains ☐ DC Supply ☐ Signal:			
Step Size:	1%			
Coupling:	☐ Cable Shielding, Grounding: ☐ 2 Sides ☐ 1 Side (+ 10nF)			
	☒ CDN			
Frequency	Note			


12 Voltage Dips and Interruptions

12.1 Test Standards

EN 55014-2:2015

EN 61000-4-11:2004

12.2 Diagram of Test Setup

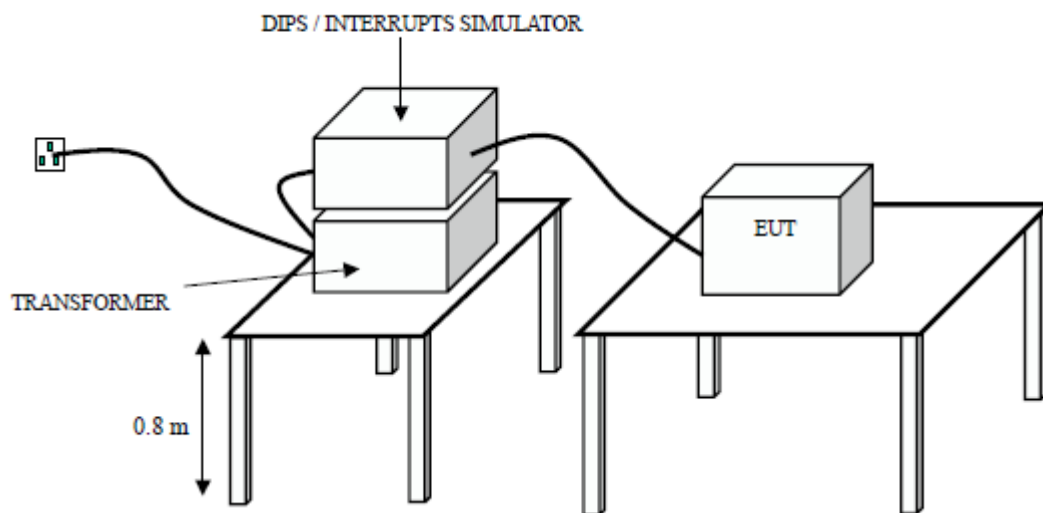

12.3 Test Equipment Used

Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
Simulator	EMTEST	UCS500M4	Aug.12, 2016	1 Year
EMCPRO	EMTEST	----	Aug.12, 2016	1 Year

12.4 Test Required and Performance Criterion

Level(Dropout %U _r)	Duration (In Period)	Performance Criterion
95	0.5	C
95	250	C
30	25	C

12.5 Test Description

12.5.1 EUT Operation

The operation mode of EUT is same as Section 3.4.2.

12.5.2 Test Procedure

EUT is connected to the simulator. When conducting the test level of 0.5 period duration, make sure that it shall start at the phase angle of 0° and 180°

12.6 Test Results

Immunity		Voltage dips, short interruptions and voltage variations			☒EN61000-4-11	
Criterion:		B&C			Total: PASS	
EUT:		Breast Pump				
Ambient:		22.3°C	53% RH	1015mbar		
Operation Mode:		Working.				
Voltage dips and short interruptions						
	Test level % UN	Voltage dip and short interruptions % UT	Duration (in period/time)	Result		Observations (Performance Criterion)
				Pass	Fail	
☒	100	0	0.5	☒	☐	C
☒	40	60	10	☒	☐	C
☒	70	30	50	☒	☐	C
Note:						

13 Photographs



Figure 1. Overview – model PM-118



Figure 2. Overview –model PM-118



Figure 3. Overview –model PM-118



Figure 4. Internal view – model PM-118



Figure 5. Internal view – model PM-118



Figure 6. Motor

===== End of Test Report =====