

INSTALLATION INSTRUCTION

Notice

1. Cleaning
Before installation, shut off the water supply valves and clean up the water supply system.
2. Mounting hole
Make sure the mounting hole size is between $\varnothing 33\text{mm}$ - $\varnothing 35\text{mm}$ as shown in the diagram
3. Protection
Clean the area of the mounting holes before installation. To preserve the delicate finish of the faucet, please do not scratch, but use a soft cloth to wipe around it. Do not tighten the faucet too hard, so as to avoid deformation or fracture.

Parameter



- | | |
|--------------------------------|---------------------------|
| 1. Water pressure | Max:0.75MPa |
| Min: 0.05MPa | |
| 2. Temperature of water supply | $\leq 85^{\circ}\text{C}$ |
| 3. Working Temperature | $\geq 0^{\circ}\text{C}$ |

Installation Steps

1. Take the faucet out of the packing box, and
 - A. For 1-hole sink, fit the white rubber washer (or ABS flange) over the hoses to the mounting shank. Then fit the faucet to the mounting hole on the sink. Or just fit the faucet to the mounting hole if no washer or flange provided, as shown in diagram 1A.
 - B. For 3-hole sink, insert deck plate over the hoses in the mounting shank, and then mount the faucet on the sink, as shown in diagram 1B.
2. Slide the rubber gasket first, the metal washer second, and then the mounting nut over the hoses onto the shank and hand tighten them firmly. Use a cross screwdriver to thread the 2 screws, as shown in diagram 2.

- 3.1 Connect the hot & cold supply lines onto the matching water valves and secure the connection with an adjustable wrench, as shown in diagram 3.

- 3.2 Turn on the hot and cold water valves then the faucet. Run the water flow for 15 seconds to clean up the lines and check for any leaks. Then the installation of non-pull kitchen faucet is completed. Hang the plastic aerator wrench on one of the hoses for future use, as shown in diagram 4.

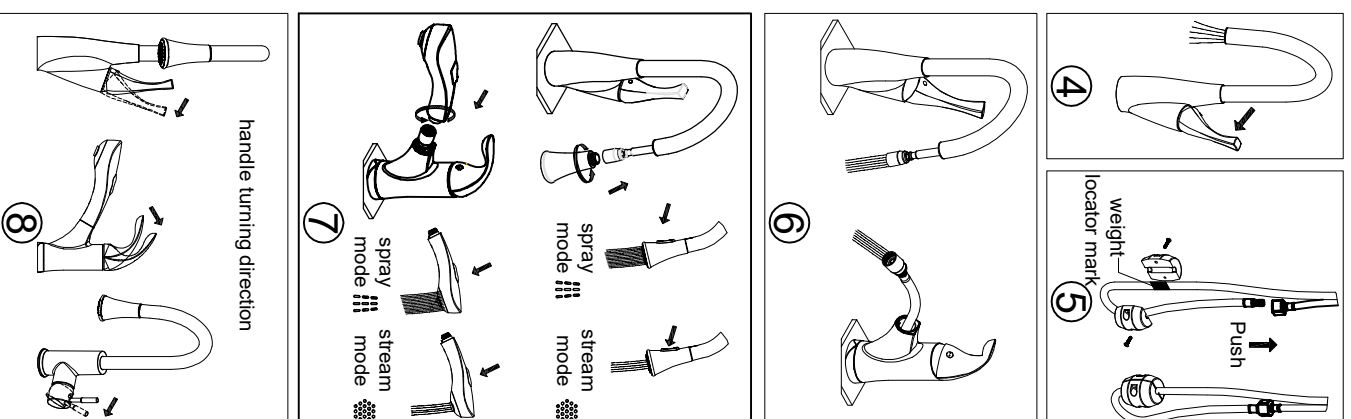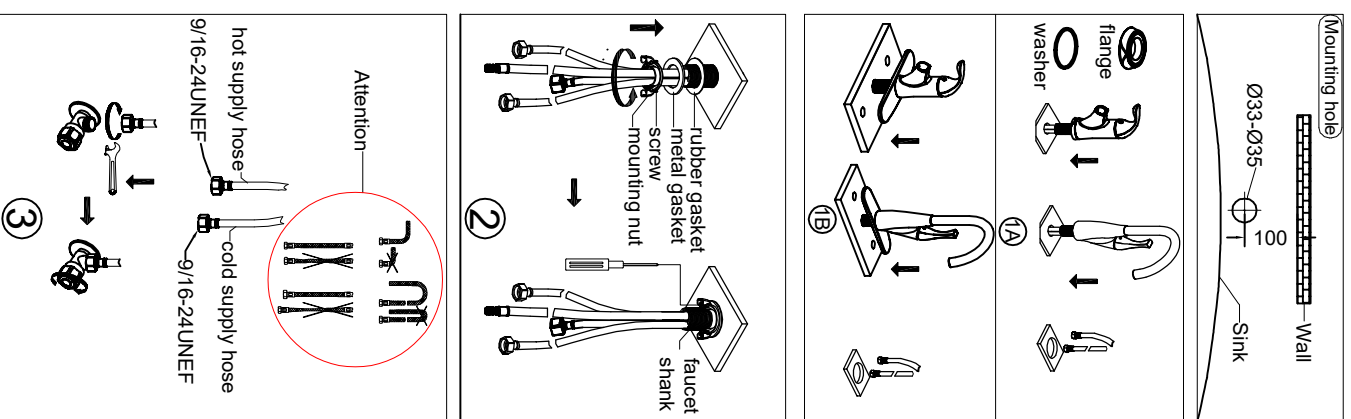

- 4.1 Connect the spray hose to the quick connection just by a simple push. Install the counterweight on the pull-down hose at the marked position(it should be placed on the line), and secure it with a cross screwdriver, as shown in diagram 5.
- 4.2 Turn on the water valves then the faucet. Run the water flow for 15 seconds to clean up the lines and check for any leaks, as shown in diagram 6.
5. Turn off the faucet. Attach and secure the spray head to the spray hose. Pull out or pull down the spray head and get it return for a few times to check the pull-out hose is functioning properly, as shown in diagram 7.
6. Test with the water running, and make certain of the faucet sprayer changes between stream and spray properly, as shown in diagram 7.
7. After the installation completed, turn on the faucet and run the water flow, check for any leaks again.

Maintenance

1. Operate the faucet gently in order for a sustainable use.
2. Always blot dry any water from faucet surface. Clean with a damp non-abrasive sponge and wipe it with a clean soft cloth should be helpful to maintain good finish of the faucet. To remove water spots, please apply warm water and a damp soft cloth. Make certain to rinse thoroughly with water immediately after cleaner.
3. Although the finish is extremely durable, it can be damaged by some cleaners. Do not use detergent powder, polishing powder, granular detergent or nylon brush to clean.
4. Do not use acidic detergents. If happened, it must be rinsed properly and wiped dry with a soft cloth.
5. When the air temperature is below 0°C , a measure should be taken to keep the faucet working condition warm.
6. Shut off the water supply valves when the faucet will not be in use for an extended amount of time.
7. We reserve the right to make revisions in the design of faucets without notice.