




Kitchen sensor faucet user manual

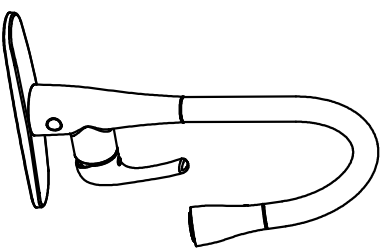

3-hole

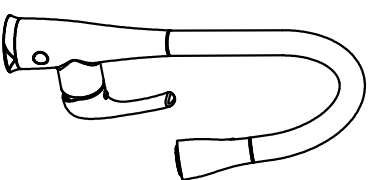


1-hole
with base

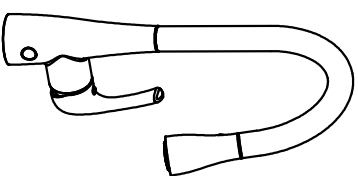

1-hole
without base


1

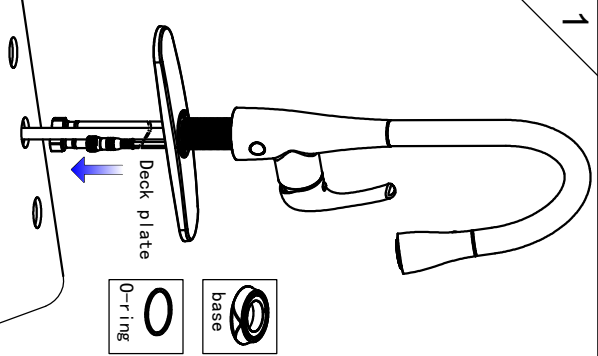

For 1-hole sink, insert the O-ring (or base) over the cable, hoses and the shank into (or to) the faucet bottom, and then mount the faucet on the sink


For 3-hole sink, insert deck plate over the cable and hoses in the mounting shank, aligning the grooves in the deck plate with the arches on the faucet bottom, and then mount the faucet on the sink.

2




Slide the rubber gasket, the flange gasket and the mounting nut in sequence over the hoses and the data cable onto the shank and hand tighten them firmly.

3



Use a cross screwdriver to thread the 2 screws.

4

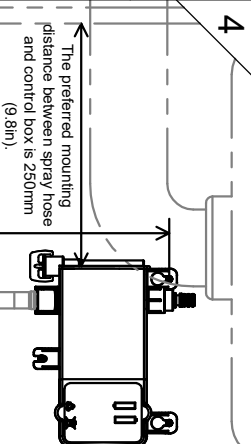


The preferred mounting distance between spray hose and control box is 250mm (9.8in).

The preferred mounting distance from control box to the floor is 450mm (17.7in).


The dimension shown in the figure is a preferred mounting distance for control box (The dimension is adjustable for better performance).

5

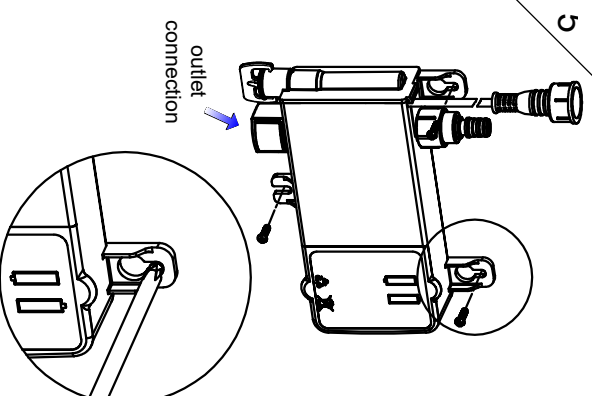


Mount the control box under the sink by a cross screwdriver according to the referential dimension, leaving some adjusting space.

6

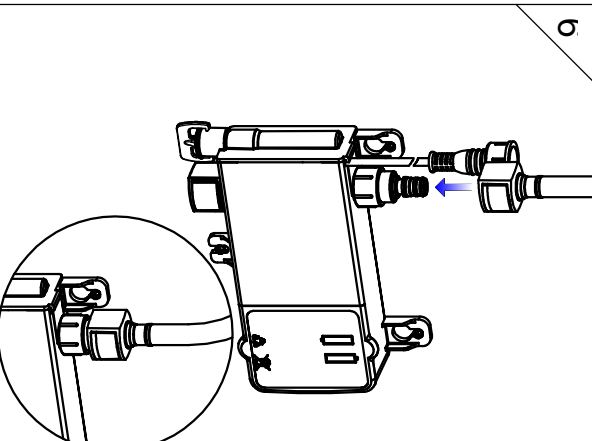


Connect the outlet hose to the control box with our innovative "quick connection".

8

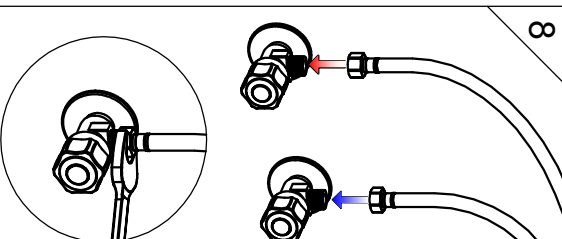

Connect the hot & cold supply lines onto the matching water valves and secure the connection with an adjustable wrench.

9

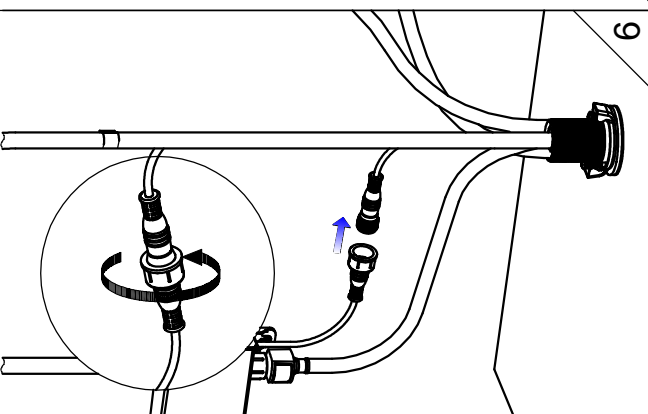

Connect the data cables and secure them hand tight.

